


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




REV.	ECN NO.	DATE	SIGN	DESCRIPTION

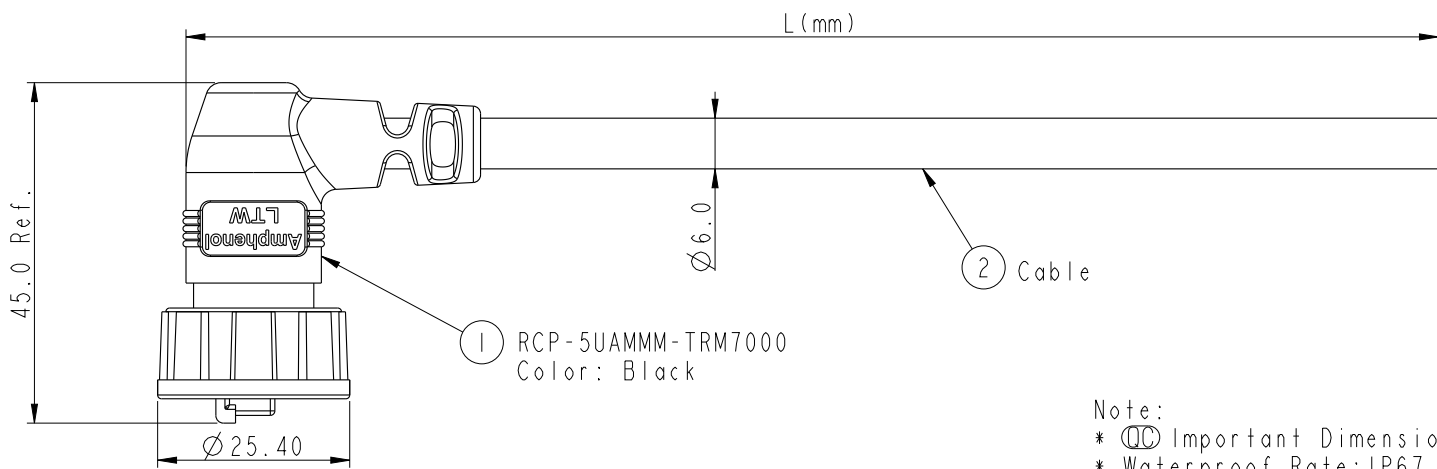

(1) RCP-5UAMMM-TRM7000
Color: Black

(2) Cable

- Note:
- * (1) Important Dimension
 - * Waterproof Rate: IP67.
 - * Plug: PC, UL94V-2, Gold Plated,
 - * Lock Nut: Nylon+GF, Black.
 - * Gasket: EPDM, Black.
 - * Cable: (A)CAT5E UTP, OD Max.: Ø 6.0, Black.
 - * Cable Length Tolerance:
 - 01M: ±40mm
 - 02~05M: ±60mm
 - 06~10M: ±100mm
 - 11~30M: ±200mm
 - 30~99M: ±500mm

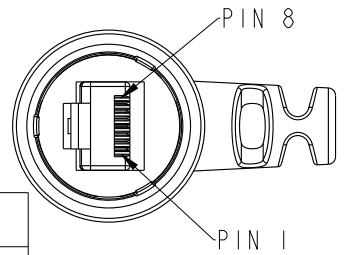

Plug

RCP-5UAMMM-TRM7AXX

XX: 01~99Meter
01: 01Meter
02: 02Meters
:
:
99: 99Meters
Cable Length(L):01~99Meters

X:
(A)CAT5E UTP

Pin Out

Wire Color	Plug
Drain Wire	接地
Brown	棕 8
Brown/white	棕白 7
Green	綠 6
Blue/white	藍白 5
Blue	藍 4
Green/white	綠白 3
Orange	橙 2
Orange/white	橙白 1

Twist 對絞
Twist 對絞
Twist 對絞

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE RJ45,C SIZE,RIGHT ANGLE CABLE 3P_LOCK 5E M CONN M PIN			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.10	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Laurence_zang	DATE 2013-04-20
DWG NO RCP-5UAMMM-TRM7AXX	CHECKED BY RAISON	DATE 2013-04-20
CUSTOMER ALTW	APPROVED BY VICTOR	DATE 2013-04-20